



CLEANING

TOPKLEAN™ EL 20A

REMOVAL OF FLUX RESIDUES
 CO-SOLVENT PROCESS
 VERY HIGH CLEANING POWER

BENEFITS

TOPKLEAN EL 20A is especially designed to clean solder flux residues after reflow. It is used in co-solvent process to offer a fast & sustainable cleaning process with very high cleaning efficiency. Its excellent ability to solubilize organic and minerals compounds allows to remove almost any solder flux residues used in the electronic industry today. It leaves no white residues and also providing a shiny effect on alloys & metals.

In a co-solvent process, TOPKLEAN EL 20A is rinsed perfectly with Hydrofluoroethers (HFE) based rinsing fluids from 3M™ Novec™ or our own PROMOSOLV™ range. Thanks to the very low surface tension of HFE, the rinsing fluid can reach very tight spaces and under low stand-off components. It will dissolve any remaining flux residues, resulting in very low ionic contamination levels. Besides, compared with a water-based cleaning system, there is no risk of corrosion due to the absence of residual water left on the boards.

TOPKLEAN EL 20A together with the co-solvent process has been a game changer for over 15 years now and is qualified and used by several actors in the electronic industry.

PERFORMANCE	▪ Excellent solubility of organic & mineral residues ▪ Excellent compatibility with materials used on PCB's ▪ Perfect cleaning, even in tight spaces and under low stand-off components ▪ Waterless process - reduces risk of corrosion
COST	▪ Fast process allows increase in production capacity ▪ Rinsing fluid is constantly recycled, limiting consumption. ▪ No water consumption & no need for wastewater treatment
HSE	▪ Low toxicity (refer to the SDS) ▪ No Ozon Depletion Potential (ODP) & no Global Warming Potential (GWP) ▪ High flash point - safe to use in process, storage & transport ▪ No aromatics & halogenated compounds

SPECIFICATIONS

SPECIFICATIONS	VALUES	METHODS
Aspect	Transparent, colorless	Visual
Density at 20°C (g/ml)	0.790 ± 0.010	BRY MO 028

CHARACTERISTICS

CHARACTERISTICS	VALUES	METHODS
Boiling point (°C / °F)	170-180 °C /	ASTM D1078
Flash Point (PMCC)	65°C / 149°F	ASTM D93
Viscosity at 25°C	1,6mm²/s	ASTM D445
Surface tension at 20°C (dynes/cm)	41	ASTM D971
Relative evaporation rate : nBuAc=1	0,06	ASTM D3539
Dielectric rigidity	200 KV/cm	DIN/VDE 0370/5
Miscibility in water	Not miscible	Internal
Relative Vapor density at 20°C	4,6	Internal
Latent heat of vaporization (kJ/kg at bp)	320	Calculated
Specific heat (kJ/kg.K)	2.0/2.1	Calculated
Heat conductivity at 20°C	0,13 W/M.K	Calculated
Presence of aromatic compounds (% weight)	<0.01 %	SMS 2728
NVR (G/100 mL)	<0,01	ASTM D1353
Water content (% weight)	<0.1	ASTM E1364
Boiling range (°C / °K)	174-199 °C / 345-390 °F	ASTM D1078

PROCESS RECOMMENDATION


The best process will depend on factors such as operating conditions, equipment, desired cleaning time and the nature of contaminants. Our team is ready to advise you.

PROCESS EXAMPLE

Mixed co-solvent process



Separated co-solvent process

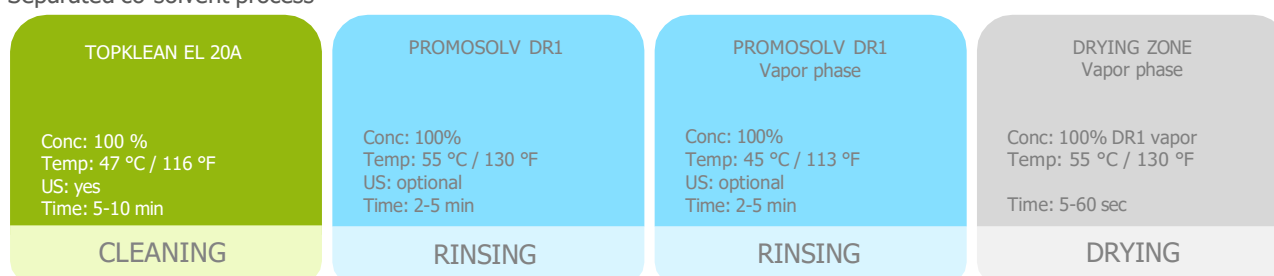

- A dedicated PCA Kit to monitor the bath status and compatibility report of TOPKLEAN EL 20A with different materials are available on request.

PACKAGING, STORAGE & SHELF LIFE

- Keep products in closed original packaging and store at room temperature.
- Shelf life is minimum 18 months from production date when kept in recommended conditions.




20 L CANISTER



200 L DRUM

HEALTH, SAFETY & ENVIRONMENT

TOPKLEAN EL 20A is **NOT** a **GREENWAY** product. Although fully in line with safety & environmental regulations, this product doesn't match our strict criteria to be labelled as a Greenway product. More info on our Greenway concept via this [link](#)



LOOKING FOR A MORE SUSTAINABLE SOLUTION?

GREENWAY ALTERNATIVE

- Topklean EL 20P

Contains no Reach Substances (on Candidate list, Annex XIV & XVII) / Contains no persistent organic pollutant (EC 850/2004) / Contains no Import/Export Hazardous substances (EU 649/ 2012)

Please refer always to the Safety Data Sheet (SDS or MSDS) prior to use. Our SDS can be downloaded at www.quickfds.com. We will request to provide your email address, so we can automatically send you a new version of the SDS when a future update would occur.

TECHNICAL SUPPORT & FREE-OF-CHARGE TESTING

Inventec has a worldwide dedicated Technical Support team to help you along the different stages of our cooperation.

Depending on your request, we provide online or onsite support

- to select the right product based on your specific needs
- to assist you in your product qualification process
- to guide you with the initial set up of you process at all your worldwide manufacturing facilities
- to provide fast response on technical issues which could occur at any time during mass production.

Customers are also welcome in our CLEANING CENTERS to see the process in action and to get convinced by our solutions. We cover water- and solvent based processes.

Inventec is unique in the world by developing not only cleaning materials but also soldering and coating solutions. These materials are very closely linked with each other from a process point of view. Talking to our Technical Team, who understands very well these 3 different product groups, will help you greatly to overcome technical challenges within your overall process.

Contact our technical support via contact@inventec.dehon.com or your local sales representative.

ABOUT INVENTEC

Inventec is a global provider of CLEANING, SOLDERING & COATING materials for Electronic, Semiconductor and Industrial applications. For over 40 years we have shown leadership in innovation by putting HEALTH IMPACT, SUSTAINABILITY and RELIABILITY at the core of our product development.

With ISO 9001 & 14001 production sites in France, Switzerland, USA, Mexico, Malaysia and China we can guarantee a smooth and cost-effective supply chain.

We supply to many industries but the excellent performance of our products in applications which demand high reliability, leads us to focus especially on the AUTOMOTIVE, AEROSPACE, SEMICONDUCTOR, ENERGY and MEDICAL industry.



Distributed by:

Guyson International Ltd

Snaygill Industrial Estate
Keighley Road
SKIPTON
North Yorkshire BD23 2QR
England

Tel: +44 (0)1756 799911
www.guyson.co.uk

Distributed by:

GUYSON S.A.

ZAC des Portes de l'Oise
2 rue Henri Becquerel
Batiment B7
60230 Chambly - France

Tél: +33 (0)1 30 28 43 16
Fax: +33 (0)1 39 37 87 71
www.guyson.fr

www.inventec.dehon.com



SOLDERING • CLEANING • COATING

In accordance with the Annex II of Directive 2011/65/UE (RoHS), including its amendments, we certify that this product does not contains quantities above 0.1% of Hg, Pb, Cr VI, PBB, PBDE, DEHP, BBP, DBP, DIBP and above 0.01% of Cd

This data is based on information that the manufacturer believes to be reliable and offered in good faith. In no event will INVENTEC PERFORMANCE CHEMICALS be responsible for special, incidental and consequential damages. The user is responsible to the Administrative Authorities (regulations for the protection of the Environment) for the conformity of his installation.

Inventec Performance Chemicals – 26 rue de Coulons. 94360 Bry-sur-Marne, France
Limited company with capital of 600 000€ - 964 500 706 RCS Créteil